

Sl. 27 :


if XPath was already there :

//counting [code='D'] /city /name
 system ... i took over counts... if code='D' then : iterates over all cities... and prints name
 XML: root of Doc.

an important change in the semantics from SQL to XML → see later

Sl. 50 relationship types

ERD:

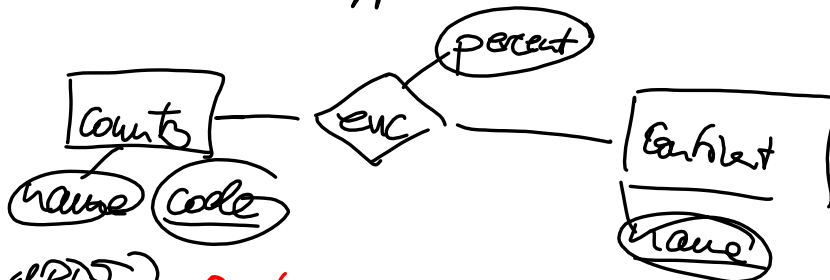

UML (and RDF): only simple binary relationship

